
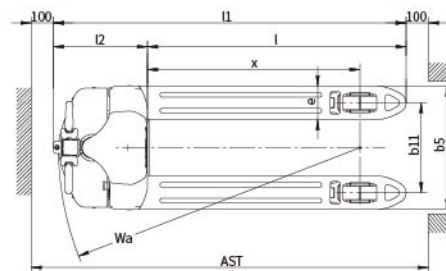


Manufacturer's Data and Design Characteristics								
	Characteristics							
1.01	Manufacturer		HELI					
1.02	Model		CBD15J-Li3		CBD18J-Li3		CBD20J-Li3	
1.03	Power unit		Electric		Electric		Electric	
1.04	Operation		Pedestrian		Pedestrian		Pedestrian	
1.05	Rated traction weight	Q (t)	1.5		1.8		2.0	
1.06	Load centre	c (mm)	600		600		600	
1.07	Axle centre to fork face	x (mm)	944		944		944	
1.08	Wheel base	y (mm)	1190		1190		1190	
Weights								
2.01	Service weight with battery	kg	138		148		150	
Wheels/Tyres								
3.01	Wheels type		Polyurethane		Polyurethane		Polyurethane	
3.02	Driving wheel size	Φ×w(mm)	Φ210×70		Φ210×70		Φ210×70	
3.03	Bearing wheel size	Φ×w(mm)	Φ80×60		Φ80×60		Φ80×60	
3.04	Wheels, number front/rear (x = driven)		1x/4		1x/4		1x/4	
3.05	Track width	b11 (mm)	400/535		400/535		400/535	
Dimensions								
4.01	Lift	h3 (mm)	200		200		200	
4.02	Overall height(With handle	h14 (mm)	725/1145		725/1145		725/1145	
4.03	Lowered length	h13 (mm)	85		85		85	
4.04	Overall length	l1 (mm)	1550		1550		1550	
4.05	Length to fork face	l2 (mm)	400		400		400	
4.06	Overall width	b1/ b2 (mm)	550/685		550/685		550/685	
4.07	Fork dimensions	s/e/l (mm)	50/150/1150		50/150/1150		50/150/1150	
4.08	Width of forks	b5 (mm)	550/685		550/685		550/685	
4.09	Min.Ground clearance	m2 (mm)	35		35		35	
4.10	Aisle width with pallet 1000 x 1200 across forks	Ast (mm)	1750		1750		1750	
4.11	Aisle width with pallet 800 x 1200 along forks	Ast (mm)	1800		1800		1800	
4.12	Min.Turning radius	Wa (mm)	1345		1345		1345	
Performance								
5.01	Travel speed,laden/unladen	(km/h)	4.2/4.5		4.2/4.5		4.2/4.5	
5.02	Maximum climbing ability, with/without load	(%)	5/10		5/10		5/10	
5.03	Service brake		Electromagnetic brake		Electromagnetic brake		Electromagnetic brake	
Drive								
6.01	Drive motor, 60 minute rating	(kW)	0.75		0.75		0.75	
6.02	Lift motor rating at S3 15%	(kW)	0.8		0.8		0.8	
6.03	Battery according to DIN 43531/35/36 A,B,C,no		no		no		no	
6.04	Battery voltage/rated capacity	(V/Ah)	24/20	24/30	24/40	48/15	48/20	48/15 48/20
6.05	Battery weight (± 5%)	(kg)	5.5	7	8.2	7	8.2	7 8.2
Others								
7.01	Type of drive control		DC		DC		DC	
7.02	Noise level at operator's ear	(dB(A))	≤70		≤70		≤70	
7.03	Steering type		Mechanical steering		Mechanical steering		Mechanical steering	
7.04	Controller brand		Curtis		Curtis		Curtis	

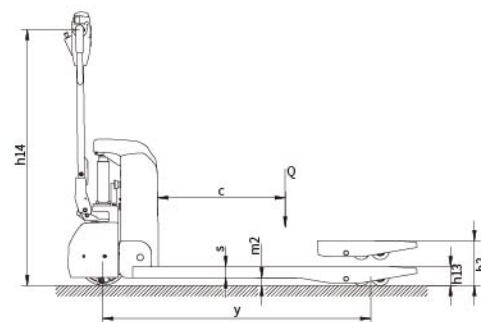

ANHUI HELI CO., LTD.

Add / No.668, FangXing Road, Hefei, China

Fax / +86-551-63639966

Tel / +86-551-63639068(America); 63639258(Europe); 63639358(Asia);
63662105(Africa & Middle East); 63639530(Overseas Marketing)

LinkedIn



YouTube



Facebook

Design&Print:Fokell Printing 20220407

CBD15J/18J/20J-Li3

The 3rd Generation Lithium Battery Pallet Truck

LITON



EMPOWER THE WORLD

www.heliforklift.net

1 EASY TO MAINTENANCE



**Lithium battery,
maintenance free**



**Brushless drive motor,
maintenance free**



5s Replace Battery



Error code display



**Perfect after-sales and
accessory services**



Built-out charger is standard

2 PERFORMANCE



Traveling speed

— UNLADEN **4.5Km/h**
+ LADEN **4.2Km/h**

Gradeability



Without load **10%**



With load **5%**

3 CHARACTERISTICS closer look into



Built-in Charger (Optional)



Built-out Charger



Concave Design



Integral Forks



PU Wheel



Smart Handle (Optional)



Normal Handle



Emergency Power-off Switch



Wire Harness Fixing Block



Protection Cover